



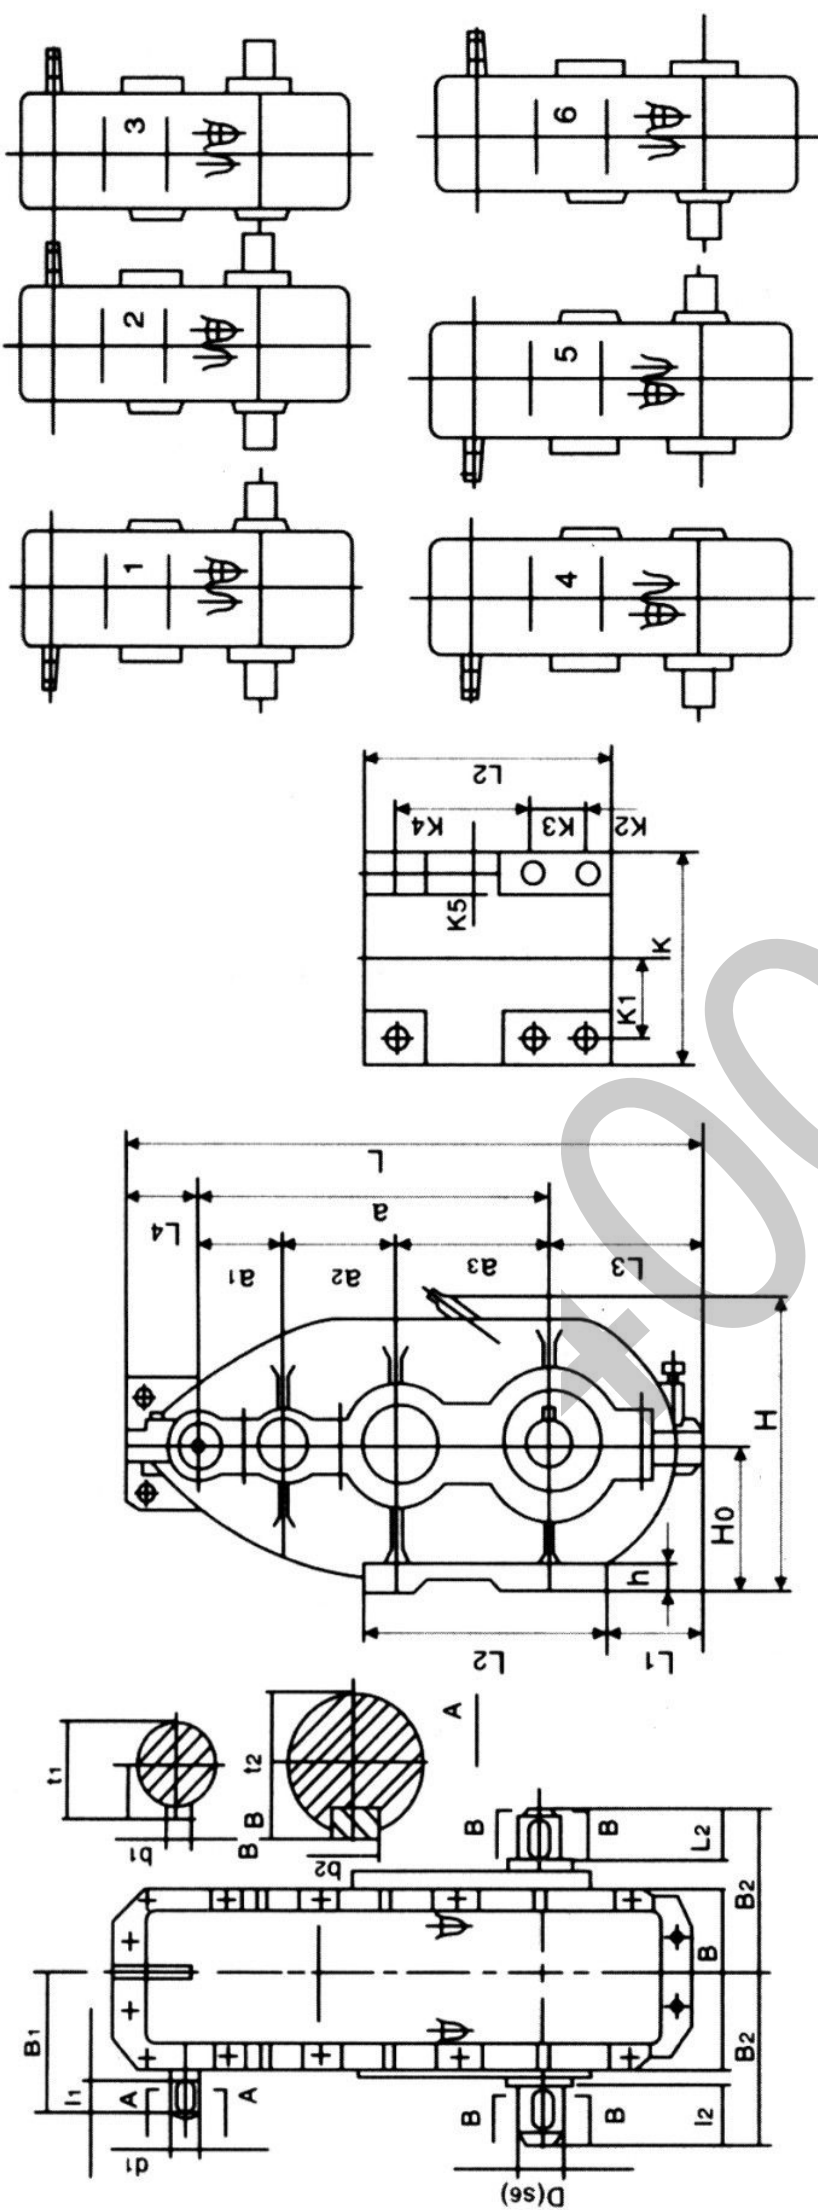

七、ZSC(L)型立式圆柱齿轮减速器

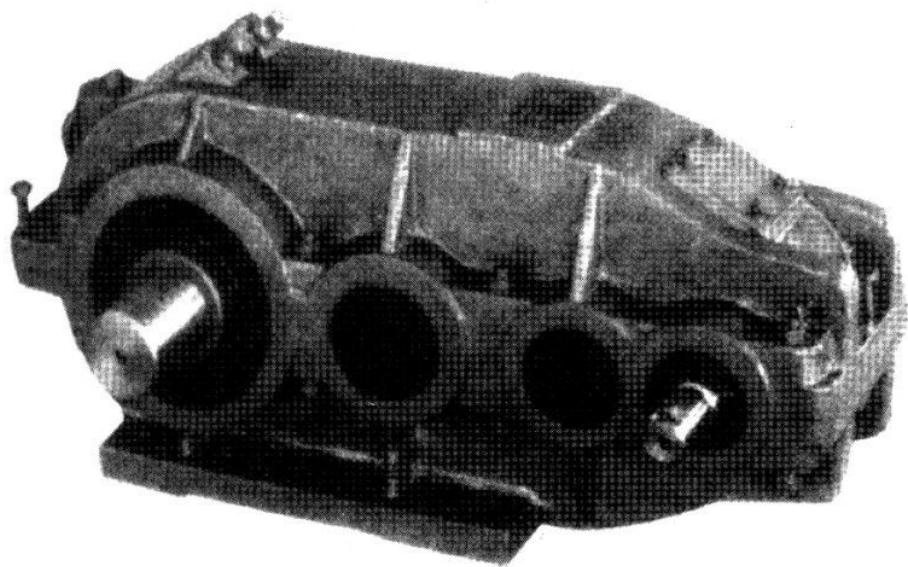

注：主动轴之轴端只有ZSC-750是锥形其余均为圆柱形

Annotation: Only the driving shaft edge of ZSC-750 type decelerator is taper and others are cylinder

型号 Type	中心距 center space			中心高 center height	轮廓尺寸 axle size		轴端尺寸 axle edge size										安装尺寸 assembling size						重量 weight kg										
	a	a1	a2	a3	HO	L	B	H	高速轴 hige - speed axle				低速轴 low - speed axle						L1	L2	L3	L4	K	h	K1	K2	K3	K4	K5	孔径 hole d	孔径 hole d		
									d1	l2	B1	b1	t1	D	l2	B2	b2	t2															
ZSC-350	350	87	123	140	130	600	180	282	22	50	145	6	24.2	45	70	170	14	48.2	110	290	152	98	195	25	77.5	42		220	50	21	4	76	
ZSC-400	400	90	140	170	150	670	210	330	30	55	170	8	32.5	65	85	205	18	68.9	100	340	170	100	230	25	95	25	280	60	21	4	170		
ZSC-600	600	150	200	250	235	980	312	480	35	55	220	10	37.8	80	115	290	24	85	160	410	250	130	340	30	140	30	120	230	85	21	6	297	
ZSC-750	750	200	250	300	335	1220	374	653	50 锥度 Taper 1:10	110	342	16	(28)	95	145	350	28	100.7	217	580	336	134	400	35	165	35	120	380	85	25	6	452	

传动比代号 No of transmission ratio	I	II	III	IV	V	VI	VII	VIII	IX
ZSC-350	35.1	17.2							
ZSC-400	16.4	22.4	37.33	49.86		27			
ZSC-600	77.5	59	46.7	37.9	27.3	31.2	21.15	17.16	14.19
ZSC-750	166.86	133.87	54.75	34.4	38.97				

传动比代号及参数
No of transmission ratio and parameters.



ZSC 立式圆柱齿轮减速器承载能力表

Table of ZSC vertical type cylindrical gear decelerator carrying capacity

型号 Type			ZSC -350						ZSC -400						ZSC -600						ZSC -750					
电机 转速 rpm	工作 级别 operation level	传动 比代号 Ratio code	I		II		I		II		I		II		I		II		I		II		I		II	
			Trans		mission		Ratio		Ratio		Ratio		Ratio		Ratio		Ratio		Ratio		Ratio		Ratio		Ratio	
			code		code		code		code		code		code		code		code		code		code		code		code	
600	M1-M3	M1-M3	25.1	17.2	22.4	16.4	37.33	49.86	32.4	27	77.5	59	46.7	37.9	27.3	31.2	21.15	17.16	14.9	166.86	133.87	54.75	31.4	38.97		
			1.2	2.5	3.5	5.0	2.1	1.5	2.31	2.73	4.1	5.4	6.9	8.5	12.0	9.78	14.4	17	21.2	2.6	3.3	8.4	10.0	10.0		
			1.0	2.2	1.9	2.0	1.4	1.2	1.54	1.82	4.1	5.4	6.9	8.5	12.0	9.78	14.4	17	21.2	2.6	3.3	8.4	10.0	10.0		
			0.6	1.1	1.3	1.4	0.9	0.8	99	1.17	2.2	2.8	3.2	3.6	4.7	4.14	6.12	72	9	2.0	2.5	5.3	7.5	6.6		
750	M1-M3	M1-M3	1.5	3.1	4.5	6.2	2.8	1.9	3.08	3.64	5.2	6.8	8.7	10.5	15.0	12.1	17.9	21	26.3	3.3	4.1	10.4	12.5	12.5		
			1.3	2.2	2.1	2.3	1.4	1.2	1.54	1.82	5.2	6.8	8.2	10.5	13.0	12.1	17.9	21	26.3	3.3	4.1	10.4	12.5	12.5		
			0.7	1.2	1.4	1.7	0.9	0.8	0.99	1.17	2.3	2.8	3.2	4.1	5.2	4.72	6.97	8.2	10.2	2.4	3.0	5.5	9.5	7.0		
			2.1	4.2	6.0	8.4	3.8	2.5	4.18	4.93	7.0	9.2	11.5	14.4	20.0	16.6	24.5	28.8	36	4.4	5.6	14.0	16.8	16.8		
1000	M1-M3	M1-M3	1.9	3.0	2.8	3.1	1.8	1.6	1.98	2.34	7.0	9.2	11.5	14.0	18.0	16.1	23.8	28	35	4.4	5.6	14.0	16.8	16.8		
			0.9	1.5	1.9	2.1	1.2	1.0	1.32	1.56	3.3	3.8	4.6	5.4	7.0	6.21	9.17	10.8	13.5	3.2	4.0	7.6	10.0	9.5		
			2.6	5.2	7.5	10.0	4.8	3.1	5.28	6.23	8.7	11.5	14.5	18.0	25.0	20.7	30.6	36	45	5.6	7.0	17.5	21.0	21.0		
			2.2	3.5	3.3	3.7	2.4	1.8	2.64	3.12	8.7	11.5	14.0	16.0	21.0	18.4	27.2	32	40	5.6	7.0	17.5	21.0	21.0		
1250	M1-M3	M1-M3	1.1	1.7	2.2	2.6	1.4	1.7	1.54	1.82	3.7	4.6	5.4	6.5	8.3	7.48	11	13	16.2	4.0	4.7	8.7	12.2	11.3		
			8.0	6.2	9.0	12.4	5.6	3.8	6.16	7.28	10.4	13.6	17.4	21.0	30.0	25.1	35.7	42	52.5	6.6	8.2	20.8	25.0	25.0		
			2.6	4.4	4.2	4.6	2.8	2.4	3.08	3.64	10.4	13.6	16.2	21.0	26.0	25.1	35.7	42	52.5	6.6	8.2	20.8	25.0	25.0		
			2.4	2.4	2.8	3.4	1.8	1.6	1.98	2.34	4.6	5.6	6.4	8.2	10.4	9.42	13.9	16.4	20.5	4.8	6.0	11.0	15.0	14.0		

